

Lantern

Lantern 1,7' flat manual

1. PARTS



	Product no	Description
①	46 40 89	Rod A for HR Lantern 1.7'
②	46 40 90	Rod B 4-in-1 set for HR Lantern 1.7'
③	46 41 71	Translucent body for HR Lantern 1.7'
④	46 41 72	Black cover for HR Lantern 1.7'

2. INSERTING RODS INTO SPEEDRING



- Connect each rod B and rod A.
- Insert the other end of rod B into a hole in the speedring.
- The second rod should be inserted into the opposite of the first. The third rod goes in diagonal position and the last one in the opposite of the third.
- Skeleton of Pancake is completed.

3. ATTACHING BODY, COVER AND THEN COMPLETED



- Cover the body over the skeleton.
- Cover goes on top of the body.
- Zip it up as much as needed.
- Each four side of cover can be open, rolled up and fixed using attached Velcro.

Lantern


Lantern 3' & 4' flat manual

1. PARTS



	Product no	Description
①	46 40 95	Rod A for HR Lantern 3'
②	46 40 96	Rod B 4-in-1 set for HR Lantern 3'
③	46 41 73	Translucent body for HR Lantern 3'
④	46 41 74	Black cover for HR Lantern 3'
⑤	46 40 97	Rod A for HR Lantern 4'
⑥	46 40 98	Rod B 4-in-1 set for HR Lantern 4'
⑦	46 41 75	Translucent body for HR Lantern 4'
⑧	46 41 76	Black cover for HR Lantern 4'

2. INSERTING RODS INTO SPEEDRING

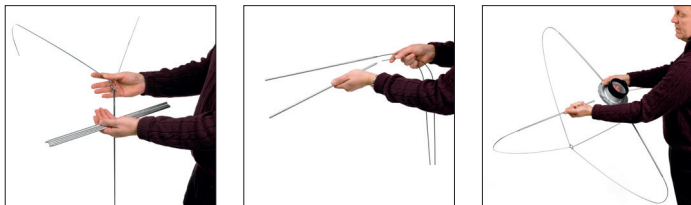

- Connect each rod B and rod A.
- Insert the other end of rod B into a hole in the speedring.
- The second rod should be inserted into the opposite of the first.
The third rod goes in diagonal position and the last one in the opposite of the third.
- Skeleton of Pancake is completed.

3. ATTACHING BODY, COVER AND THEN COMPLETED



- Cover the body over the skeleton.
- It might be necessary to remove one rod to be able to fit the body.
- Cover goes on top of the body.
- Zip it up as much as needed.
- Each four side of cover can be open, rolled up and fixed using attached Velcro.

This product can be modified for better quality and function without prior notice